




## TECHNICAL PROPERTIES

### Abrasion



### Cut



### Tear



### Impact



### Needle




### Puncture




### Heat



### Arc Flash




### Water & oil resistance



### Grip



### Breathing

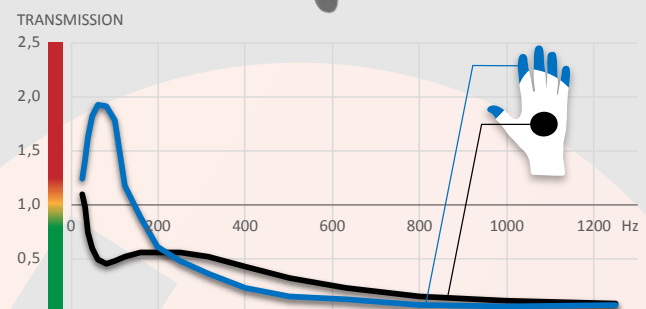

EN388



2121X


A: ABRASION (1-4)  
B: CUT (1-5)  
C: TEAR (1-4)  
D: PUNCTURE (1-4)  
F: ISO CUT (A-F)  
P: IMPACT PROTECTION

ISO (A-F)  
A | > 2 N  
B | ≥ 5 N  
C | ≥ 10 N  
D | ≥ 15 N  
E | > 22 N  
F | > 30 N

EN10819 VIBRATION:

TRM = 0,67

TRH = 0,45



ART.NO: IMPVIBAMP  
12 pairs (1 dozen)/Carton

CE  
CAT II

8	9	10	11
S	M	L	XL